Biglift 2.55 Saav 145 Jumbo

Electro-hydraulic twin-ram lift, 5.5 t capacity, superstructure with arms





Application

- ☐ Repairs and maintenance

Approvals / recommendations

- ☐ Jaguar
- ☐ Volkswagen Group

Description:

Steel cassette:
- ☐ Waterproof steel cassette

Hydraulic unit:
- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- ☐ Great stability, even with uneven weight distribution; due to the cylinder diameter of 213 mm

Superstructure:
- ☐ Double telescopic arms, crosswise adjustable
- ☐ Internal arm locking system
- ☐ Low minimum height

Standard colours
- ☐ Base plate: RAL 7016 - grey
- ☐ Arms: RAL 3020 - red

Versions:

Steel cassette:
- ☐ Zinc-coated
- ☐ Coated
- ☐ Self-carrying

Installation:
- ☐ Superstructure on floor
- ☐ Ceiling installation

Optional extras:

- ☐ Large program of extra pads

Zinc coating and special colours on request!

Click the QR-Code
for detailed product information.


Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH
Sandkampstraße 90
D-48432 Rheine
+49 5971 8602-02
info@autopstenhoj.com

Technical data	
Lifting capacity	5,500 kg
Lifting height	1,860 mm
Working height	1,958 – 2,005 mm
Cylinder diameter	2 x 213 mm
Distance between cylinders	1,350 mm
Lifting / lowering time (high pressure)	approx. 45 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	17 l
Voltage	230 / 400 V – 50 Hz – 16 A

Arm superstructure	
Total width	3,130 mm
Lifting pad included in the delivery	16008 (98-145 mm)
Min. height	75 mm
Arm length, min. - max.	720 - 1.415 mm

Serienausstattung:
min. ca. 98 mm
max. ca. 145 mm
(andere Steckpilze auf Anfrage)

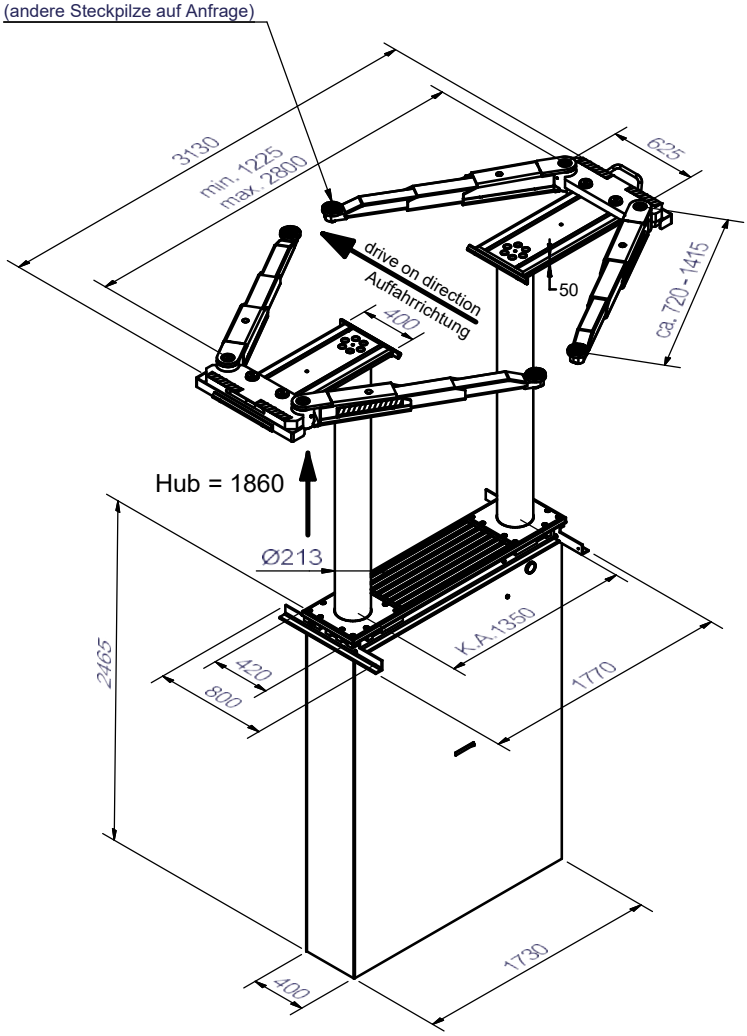



Slidable superstructure



Internal arm locking system



Corrosion-free guiding elements

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 10/2026